



Container's Identity Plate & Safety Approval Data



APPROVED FOR TRANSPORT UNDER CUSTOMS SEAL	
R O K / 083 — K R / 88	
TYPE HSM — 4126-R	MANUFACTURER'S NUMBER HSMF
ZIM INTEGRATED SHIPPING SERVICES LTD. P.O.BOX 1723, HAIFA 31000, ISRAEL.	
TIMBER COMPONENT TREATMENT IM/ /8 MANUFACTURED BY HYOSUNG METALS	
CSC SAFETY APPROVAL	
USA/AB- /8	
DATE MANUFACTURED	2004
IDENTIFICATION NO.	ZCSU 246982-5
MAXIMUM GROSS WEIGHT	30,480KG / 67,200lbs
ALLOWABLE WEIGHT FOR 1.8G	216,000KG / 476,190lbs
RACKING TEST LOAD VALUE	15,240KG / 33,600lbs
ACEP IL-01	

Custom Seal Approval Number

Manufacturer's Number

Timber Component Treatment
Australian Requirement


Manufacturer Owner

CSC Number

Container's Number
(Prefix and Number)

Max. Gross Weight

A Guide to 20' & 40' Containers

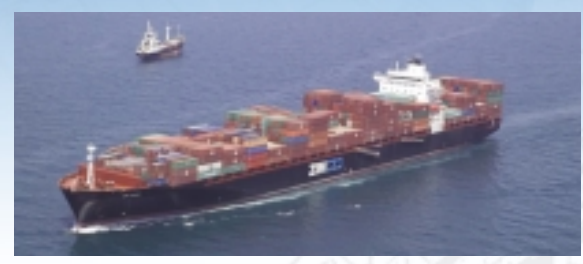

Zim's computerized logistics system, operated by a professional and experienced staff, guarantees:

- Adjustment of stock levels to the changing needs of its customers.
- Lower average age of its container fleet which does not exceed five years.
- Continuous tracking of each container, on board or on land.
- Maintenance of the container fleet according to international standards of quality and safety.

Zim operates over 410,000 TEU of various types. Zim's containers are maintained in good and safe condition to International Containers Standards and CSC-Container Safety Convention.

To manage its inventory, Zim has developed sophisticated logistics systems encompassing planning, marketing, new-building, purchase and leasing, inventory control, maintenance and repair and sale of containers.



Zim operates over 410,000 TEU's of various types

	20'	40'
Length	6,058mm (19'10 ¹ / ₂ "	12,192mm (40")
Width	2,438mm (8')	2,438mm (8')
Height	2,591mm (8'6")	2,591mm (8'6")
High Cube Height		2,896mm(9'6")

A Guide to 20' & 40' Containers

Type of Containers	General Use	Size	Weight*			Internal Dimensions*			Door Opening*		VOL. M ³ /Ft ³	Notes
			Kilograms/Lbs			Millimeters/Feet/Inches			Millimeters/Feet/Inches			
			Feet	Max. Gross Wt.	Tare Wt.	Max. Payload	Length	Width	Height	Width		
Dry Van/General	Suitable for commodities in bundles, cartons, boxes, loose cargo, bulk, furniture, etc.	20	24,000 52,910	2,200 4,850	21,800 48,060	5,902 19'4 23/64"	2,350 7'8 33/64"	2,392 7'10 11/64"	2,341 7'8 11/64"	2,280 7'5 49/64"	33.2 1,172	All Steel Construction
		20	30,480 67,200	2,250 4,960	28,230 62,240	5,902 19'4 23/64"	2,350 7'8 33/64"	2,392 7'10 11/64"	2,341 7'8 11/64"	2,280 7'5 49/64"	33.2 1,172	
		40	30,480 67,200	3,800 8,380	26,680 58,820	12,032 39'5 45/64"	2,350 7'8 33/64"	2,390 7'10 11/64"	2,341 7'8 11/64"	2,280 7'5 49/64"	67.6 2,387	
		40	32,500 71,650	3,800 8,380	28,700 63,270	12,032 39'5 45/64"	2,350 7'8 33/64"	2,390 7'10 11/64"	2,341 7'8 11/64"	2,280 7'5 49/64"	67.6 2,387	
High Cube	Same as dry containers, but higher volume capacity.	40	30,480 67,200	3,900 8,600	26,580 58,600	12,032 39'5 45/64"	2,350 7'8 33/64"	2,695.5 8'10 1/8"	2,338 7'8 3/64"	2,585 8'5 49/64"	76.2 2,690	steel
		40	32,500 71,650	3,920 8,640	28,580 63,010	12,032 39'5 45/64"	2,350 7'8 33/64"	2,698 8'10 1/8"	2,338 7'8 3/64"	2,585 8'5 49/64"	76.4 2,690	
		45	30,480 67,200	4,800 10,580	25,680 56,620	13,556 44'5 11/16"	2,350 8 33/64"	2,698 10 7/32"	2,338 7'8 3/64"	2,585 8'5 49/64"	86.0 3,040	
		45	32,500 71,650	4,800 10,580	27,700 4,800	13,556 44'5 11/16"	2,350 8 33/64"	2,698 10 7/32"	2,338 7'8 3/64"	2,585 8'5 49/64"	86.0 3,040	
Open Top	Suitable for high large piece cargo that cannot be loaded through container doors such as machinery, sheet glass, marble, building materials and lumber.	20	24,000 52,910	2,140 4,717	21,860 48,192	5,894 19'4 1/8"	2,344 7'8 5/16"	2,347 7'8 3/8"	2,336 7'7 15/16"	2,275 7'5 1/2"	31.5 1,112	Door headlock removable steel
		20	30,480 67,200	2,250 4,960	28,230 62,240	5,894 19'4 1/8"	2,344 7'8 5/16"	2,347 7'8 3/8"	2,336 7'7 15/16"	2,275 7'5 1/2"	31.5 1,112	
		40	30,480 67,200	3,800 8,158	26,680 59,049	12,027 39'5 1/2"	2,344 7'8 5/16"	2,347 7'8 3/8"	2,336 7'7 15/16"	2,275 7'5 1/2"	67.0 2,365.6	
Flat Platform Collapsible Flush Folding	Used for carrying awkward and oversize loads such as machinery, cables, drums, sheet and steel coils, heavy vehicles, timber and forest products.	20	34,000 74,950	2,890 6,370	31,110 68,580	5,988 19'7 3/4"	2,398 7'10 3/8"	2,231 7'7 3/8"				steel
		40	45,000 99,202	4,950 11,683	40,050 87,518	12,064 11,662	2,369 2,179"	1,943 6'4 1/2"				
		40	50,000 110,230	5,000 11,023	45,000 99,207	11,980 11,762	2,378 2,190"	1,960 6'5 1/8"				
Reefer	Suitable for transporting perishable cargo as vegetables, fruit, meat, etc.	20	24,000 52,910	2,850 6,280	21,150 46,630	5,449 17'10 1/2"	2,286 7'6"	To Loadline 2,122 89 7/16"	2,294 90 5/16"	2,266 89 3/16"	To Loadline 26.1 9.21	Aluminum & Stainless Steel
		40	30,480 67,200	4,580 10,090	25,900 57,100	11,550 37'10 1/2"	2,280 89.7"	2,092 88.3 "	2,280 89.7"	2,197 86.5"	55.3 1,935	
Reefer High Cube	Same as Reefer 40', but higher volume capacity.	40	32,500 71,650	4,650 10,250	27,850 61,400	11,583 38'	2,286 7'6"	To Loadline 2,404 8'10 5/8"	2,294 7'6 5/16"	2,571 8'5 1/4"	To Loadline 63.5 2,242	Aluminum & Stainless Steel
		40	34,000 74,960	4,900 10,800	29,100 64,160	11,590 38'19/64"	2,286 7'6"	2,401 8'10 1/2"	2,294 7'6 5/16"	2,571 8'5 1/4"	67.5 2,384ft ³	

* The dimensions and weights are based on manufacturer's specifications. Tolerance factor must always be taken into account by shipper. All information in the Container Guide is general data only. The accurate Max. Gross Weight should be according to the container CSC plate.



All drawings shown are 20' containers



High Cube



Dry Van/General



Open Top



Flat



Reefer



Reefer High Cube